


Berry Bird Scrubber

Model B-BS-4



The Berry Bird Scrubber BBS4 is constructed of stainless steel material designed as a round cabinet. It has the capacity to cleanse up to 300 birds per minute. The Berry Bird Scrubber 4 should be positioned after the killer and before the scalders on the picking line or after the inspectors but before the bird chiller on the evisceration line. The continuous motion of the fingers brushing the bird combined with the spray nozzles rinsing the matter away results in a reduction of the level of contamination. Poultry processing plants may spend upward of \$25,000 per month for on line processing aids to reduce contamination. The BBS4 should drastically reduce or possibly eliminate the need for the on-line additives thereby reducing the cost incurred.

Berry Bird Scrubber - Model B-BS-4

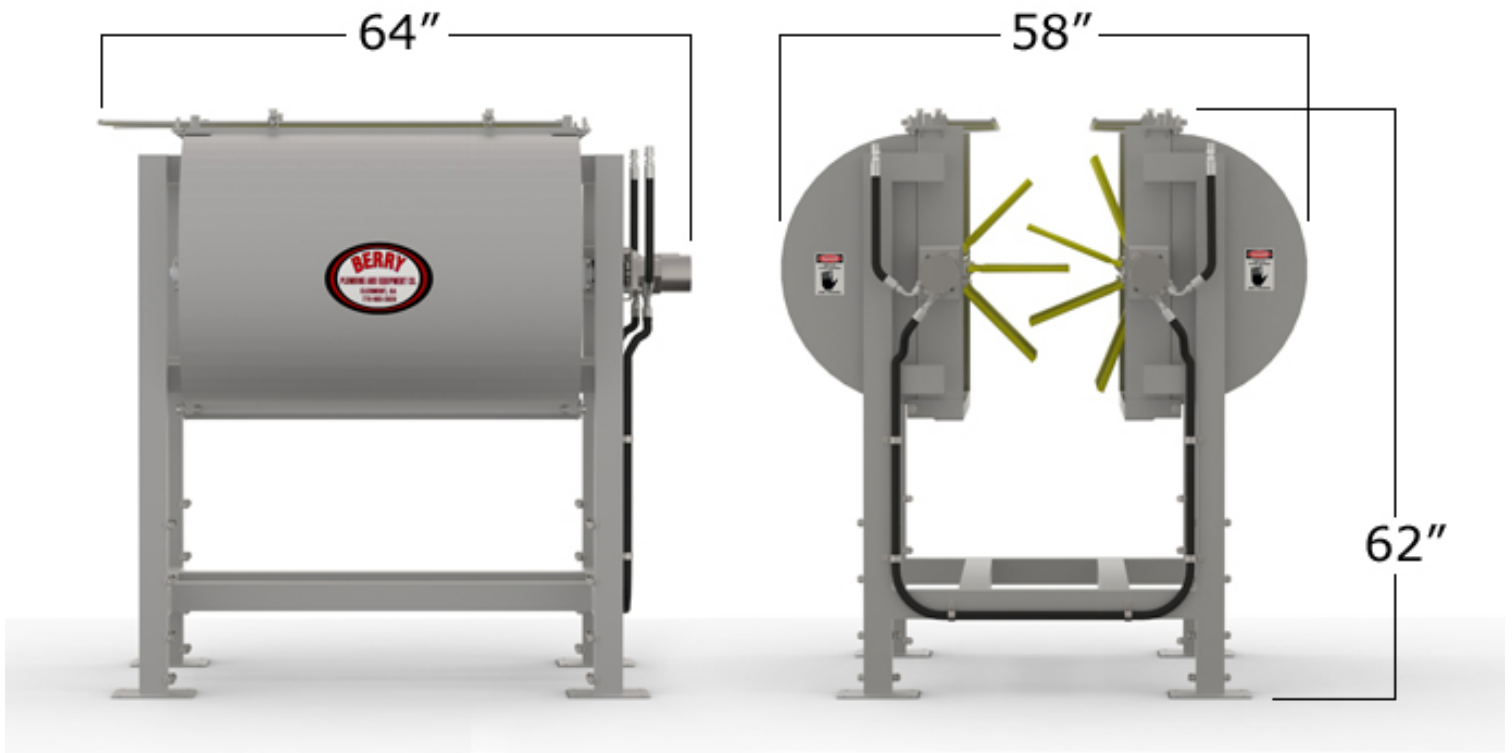

WATER	Qty 2 - 1/2" NPT CONNECTION (9) 1/4" SPRAY NOZZLES PER SIDE 10.8 GPM @ 40 PSI USING 5 PPM CHLORINE (FROM BERRY WATER REUSE SCREEN)
POWER	(2) HYDRAULIC MOTORS, 15 GPM @ 950 PSI
CAPACITY	UP TO 300 BPM
HEIGHT	APPROX 62" ADJUSTABLE: DETERMINED BY SHACKLE SETUP AND BIRD SIZE
WIDTH	APPROX 58"
LENGTH	APPROX 64"

Berry Plumbing & Equipment

6736 Cleveland Highway, Clermont Georgia 30527

Email: tberry@berryequipment.net

Phone: 770-983-3929 Toll Free Fax: 1-866-808-9957

Berry Bird Scrubber - B-BS-4

Construction:

The **Berry BS4** is designed for maximum safety and ease of operation. The machine is constructed entirely of stainless steel for durability and easy cleanup.

Operation:

The **Berry Bird Scrubber 4** is hydraulically driven to rotate the rubber fingers in a downward motion to gently loosen fecal matter to be rinsed away by the spray nozzles.

Maintenance:

With proper operation, regular maintenance of the **Berry Bird Scrubber 4** should be daily cleaning and checking of various parts for wear and fractures on parts such as the fingers and hoses.

Capacity (GPM) @ Various Pressures (PSI) Per Nozzle

PSI	5	7	10	15	20	30	40	50	60	80	100	150	300
GPM per nozzle	.21	.25	.30	.37	.42	.52	.60	.67	.73	.85	.95	1.16	1.64

The specifications as stated herein are the most current at the time of publication. However, consistent with our standard of continual product development, we reserve the right to change the design without notice or obligation to modify any equipment previously sold or delivered.

02/16/2012

Berry Plumbing & Equipment

6736 Cleveland Highway, Clermont Georgia 30527

Email: tberry@berryequipment.net

Phone: 770-983-3929 Toll Free Fax: 1-866-808-9957